






DampProof Slim Value














	EAN	W	K	lm	lm/W	L x W x H	IP	IK	R _a	∠	°(°C)	V _{AC}	Hz	⚖️
DP Slim Value 1200 IP65	4058075066458	36	4000K	4000	110	1200 x 35 x 48	65	08	> 80	120°	-20...+40	220-240V	50/60 Hz	0.5 kg
	4058075066472	36	6500K	4000	110	1200 x 35 x 48	65	08	> 80	120°	-20...+40	220-240V	50/60 Hz	0.5 kg
DP Slim Value 1500 IP65	4058075066496	50	4000K	5500	110	1500 x 35 x 48	65	08	> 80	120°	-20...+40	220-240V	50/60 Hz	0.5 kg
	4058075066519	50	6500K	5500	110	1500 x 35 x 48	65	08	> 80	120°	-20...+40	220-240V	50/60 Hz	0.5 kg

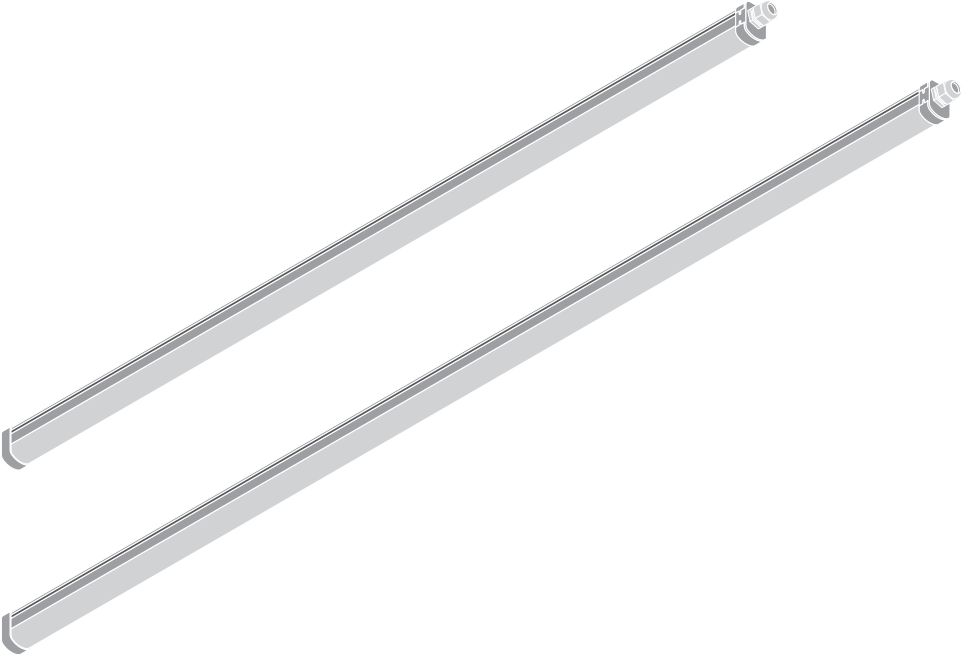


DampProof Slim Value

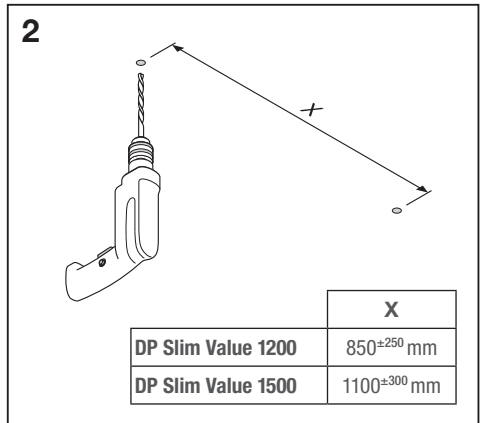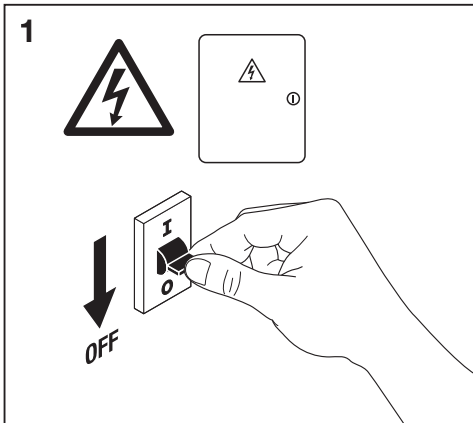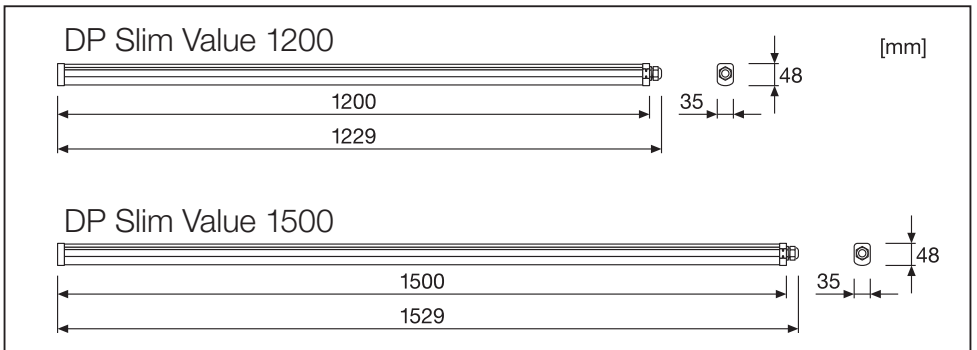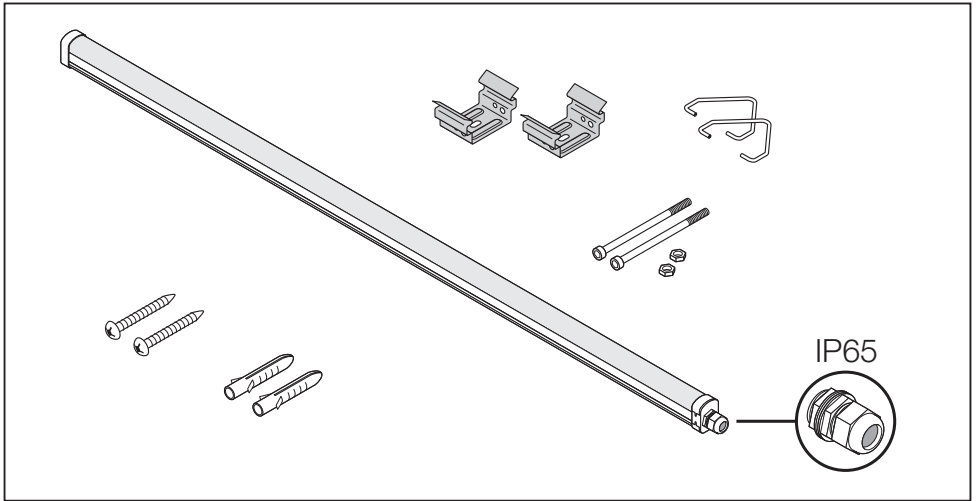

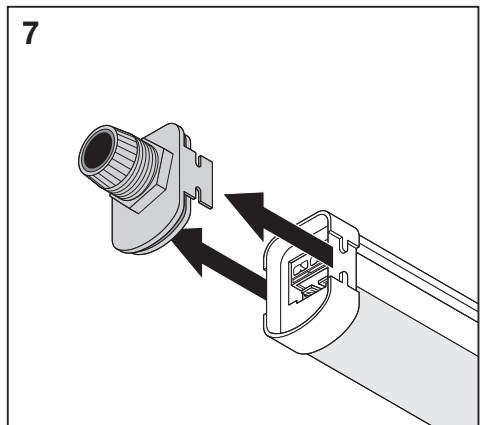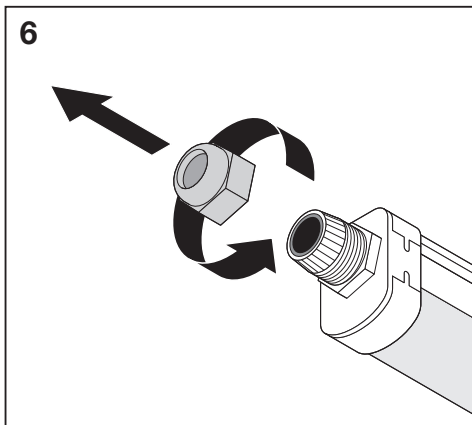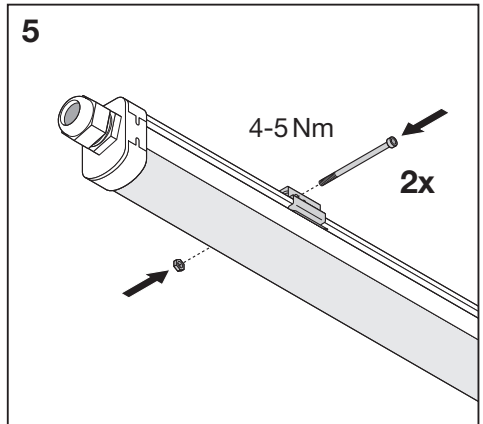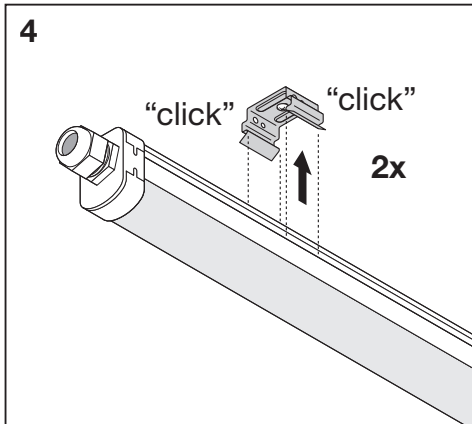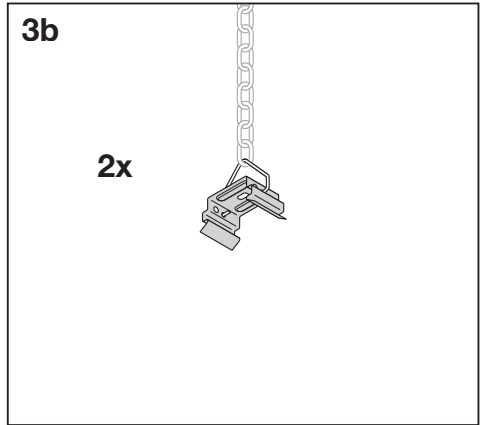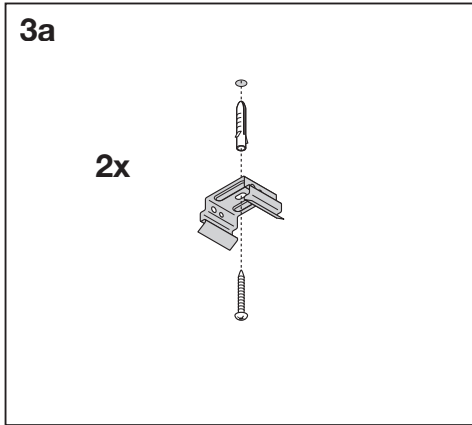

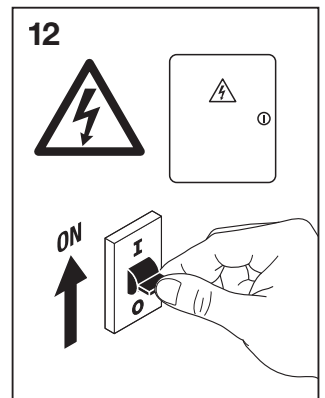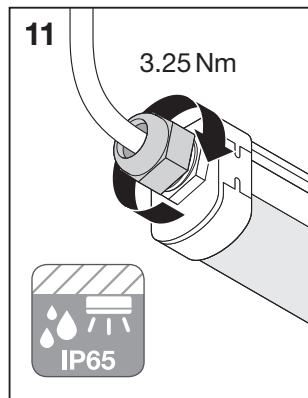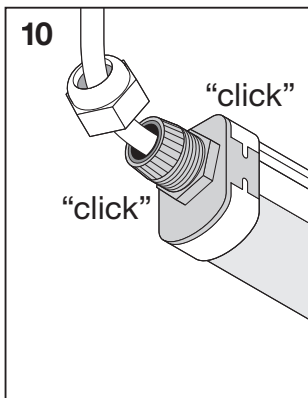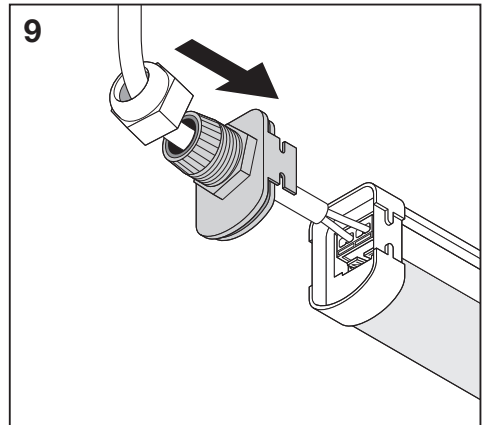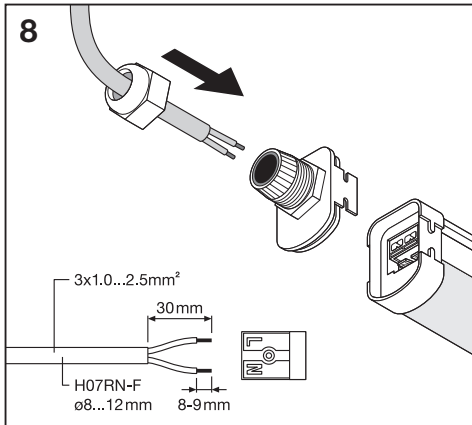

www.luminaires.ledvance.com

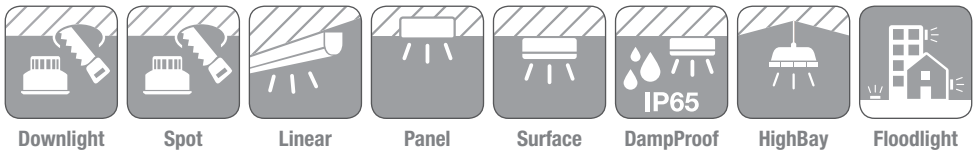

CE RoHS



C10449057
G11023101
18.08.17

LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg
Germany
www.ledvance.com